

1 INSTRUCTIONS AND RECOMMENDATIONS



Switch off the mains before commencing any work

 Strip the wires back for about 10mm


Mechanisms with screw terminals




For single units, use casings 50mm deep, diameter 67 or 68mm

2 WIRING

087-560G RCA AUDIO-VIDEO
087-560B RCA AUDIO-VIDEO

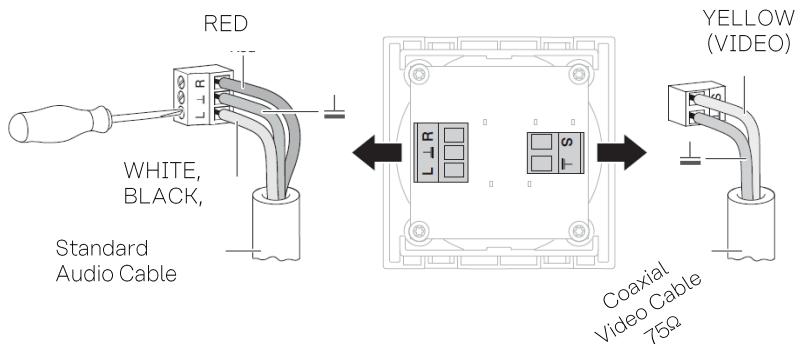


087-570G RCA AUDIO
087-570B RCA AUDIO

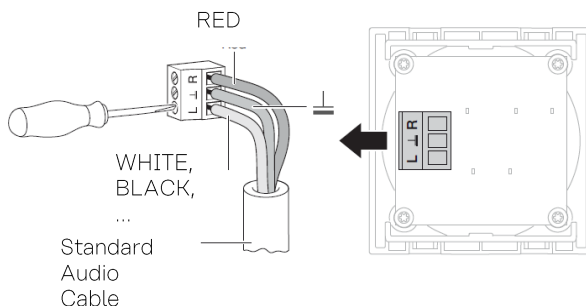



3 FITTING

After wiring according to the instructions, place the mechanism in the flush-mount box and screw on the plate according to the diagram opposite.

Screws supplied with the flush-mount box.

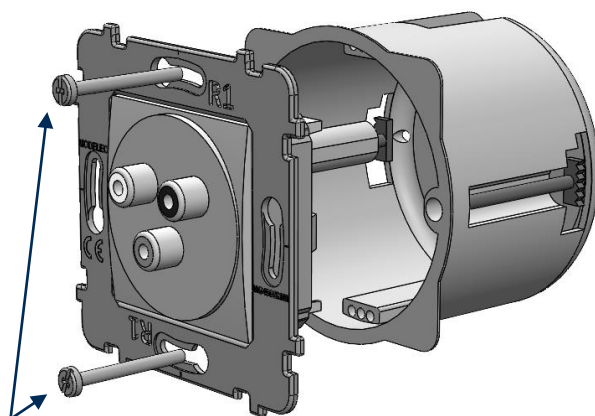

4 TABLE OF RELEVANT REFERENCES



Reference and description:

087-560G RCA AUDIO-VIDEO
087-570G RCA AUDIO

Compatible with:

Confidence Collection



087-560B RCA AUDIO-VIDEO
087-570B RCA AUDIO

Désir Collection

5 CERTIFICATIONS

